

TRUE FRAME MOUNTED CAMPER TIE DOWNS

important owner-operator installation instructions C2202/FMTPJ99CH

FRONT TIEDOWNS
CHAIN AND CLEVIS REMOVED 07.06.2011

Minor movement (or settling) can occur in some incidental harsh driving conditions (on or off road).

A rubber bed mat is not a requirement to maintain the lifetime warranty on a Torklift system, but a strong recommendation, simply as a safety precaution to protect the truck bed, the bottom of the camper and to give the camper additional support.

Warning!!

TORKLIFT <u>DOES NOT</u> RECOMMEND: Installing your truck camper in your truck on top of a drop in plastic bed liner!!! <u>THIS WILL VOID YOUR WARRANTY!</u>

The drop in plastic bed liners can slide on top of the truck bed surface, and the camper can slide on top of the slick surface of the bed liner. The liner can also act as a spring causing a trampoline effect increasing vertical truck camper movement, independent of the vehicle, possibly resulting in truck bed damage and/or camper damage!



REVISED vers3 BY: MWP 10/31/2012

TECH SUPPORT (800) 246-8132

AFTER INSTALL, PLEASE GIVE
THIS BOOKLET TO YOUR CUSTOMER

C2202 PARTS INVENTORY

2 - TIE DOWN RECEIVERS
2 - STRAIGHT INSERTS
4 - 1/2" X 2" HEX BOLTS
12 1/2" FLAT WASHERS
2 - 3/8" X 1- 1/2" HEX BOLTS
4 - 3/8" FLAT WASHERS
2 - 3/8" NUTS

12 - 1/2" FLAT WASHERS 2 - 3/8" NUTS 4 - 1/2" LOCK WASHERS 2 - 1/4" PINS

4 - 1/2" NUTS 1 - 3/8" BOLT FISHER

INSTALLATION INSTRUCTIONS:

READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE STARTING. DRILLING MAY BE REQUIRED ON SOME VEHICLES

STEP 1. Identify both front tie down receivers. Hold the bracket up to the side of the frame at the front of the bed to get an idea of how the receiver attaches to the frame (See Page 3, Photo 3). Looking up at the bottom of the bed, remove the factory bolt that attaches the bed cross memeber to the bed support perch. Hold the tie down receiver up into place and re-install the factory bolt through the larger of the two holes in the upper flange, making sure the frame plate lines up with the two factory holes on the side of the frame. Do not tighten the unit at this time. Mark the 3/8" hole on the bottom of the box channel. Remove the tiedown receiver and drill out the upper hole to 7/16". Put the tiedown receiver back into place and reinstall the factory bolt. (NOTE: YOU WILL USE TWO OF THE EXISTING FOUR HOLES THAT LINE UP WITH THE FACTORY HOLES.) The hole beside the factory bolt you just installed will need to have a 3/8" x 1- 1/2" bolt with a 3/8" flatwasher fished into it with supplied bolt fisher (see page 4, photos 4 & 5). When fishing these bolts, put the coiled end of the bolt fisher into one of the holes and bring it out of the top of the frame. Insert the threaded end of the bolt onto the fisher and slowly remove the fisher, pulling the threaded end back through the desired hole (see page 15 for bolt fisher). (NOTE: there will be a gap between the plate with the 3/8" bolt and the upper support.) Tighten to 35ft lbs. Now install 1 flat washer with 1/2" X 2" hex bolts in the two factory holes in the side of the frame - make sure the threads are sticking out towards the outside of the truck. Install the 2 flat washers, lock washer and nut on each bolt. Tighten to 60ft lbs.


Warning: make sure all wire harnesses, brake, and fuel lines are clear when tightening, or damage may occur!

- **STEP 2.** Find one insert and one 1/4" pin and put the insert into the tiedown receiver, install the 1/4" pin. Make sure that the triangle plate on the end of the front insert is pointing towards the front of the truck, and towards the rear of the truck on the back. This bracket is designed to increase the angle of the tiedown chain.
- **STEP 3.** Double-check that all bolts are tight and that there is at least 1" of clearance between insert and the bed lip. Repeat steps 1 through 3 on passenger side.

ILLUSTRATED DIAGRAMS

LONG BED WITH FACTORY HOLES MARKED

PHOTO 1

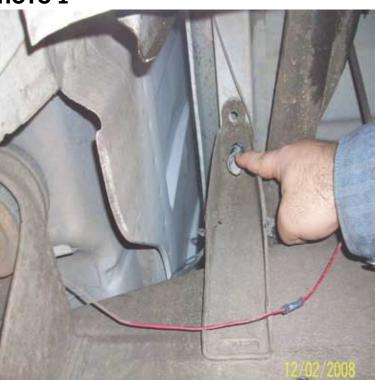



REMOVE THIS FACTORY BOLT

PHOTO 3) PASSENGER SIDE SHORT BED DEPICTED BELOW



Page 3


ILLUSTRATED DIAGRAMS (CONTINUED)

PHOTO 4



After marking and drilling your holes in the frame and the bottom of the box support channel, use the bolt fisher and place the smaller of the two ends of the fisher into the hole. Pull the fisher out the end of the box channel. Now thread one of the 3/8" bolts (include a 3/8 flat washer) onto the end of the fisher. Now gently pull the fisher back out until the bolt drops in the hole. (Bolt fisher guide on page 15)

PHOTO 5

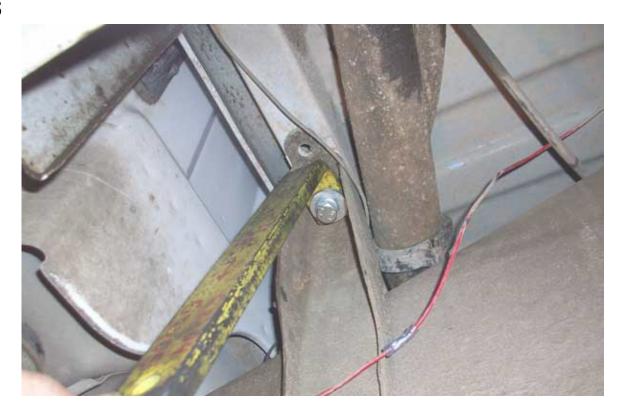

INSTRUCTIONS FOR MAINTENANCE OF POLISHED STAINLESS STEEL PRODUCTS



Torklift utilizes quality grade 304 stainless steel in this product.

304 stainless steel is well known for its anti corrosive properties, however in some environments such as coastal regions or when in contact with some road chemicals, corrosion may occur.

We recommend occasional polishing of our product to maintain its attractive finish. Use an approved stainless steel cleaning/polishing product which can be purchased from any automotive supplier.



PART NUMBER: A7009



Glouistep The Ultimate Scissor Step

"I love this thing. Its light and the steps glow in the dark. It folds up nice and I can store it inside one of my storage bays. What a difference going up and down a decent set of steps compared to those 'death trap' steps that the factories put on."

-Kerry Stark, PA

- >> LIFETIME WARRANTY
- GLOWS IN THE DARK FOR 10 HOURS WITH
 ONLY 5 MINUTES OF LIGHT EXPOSURE
- >> SELF ILLUMINATING STEPS NO BATTERIES
- SAFELY ENTER AND EXIT YOUR RV AFTER DARK
- SUREGRIP™ STEP TREAD NO GRIP TAPE
- **STORES IN POSITION**
- **LOCKABLE**
- EXCLUSIVE: ADJUSTES TO BASEMENT MODEL
 CAMPERS
- 100% ALUMINUM AND STAINLESS STEEL
- STAINLESS BOLTED HINGES ALLOW FOR EASY STEP ADDITION OR REMOVAL (ADD-A-STEP KIT PART # A7501)





Part #: A7509

Add-a-Step

Parg#8A7501



2 Step - A7502 Mounting Bracket Height -19.5"

Max Weight Cap.: 350lbs. with GlowGuide Handrail**

3 Step - A7503 Mounting Bracket Height -27"

Max Weight Cap.: 350lbs. with GlowGuide Handrail**

4 Step - A7504 Mounting Bracket Height -34.5"

Max Weight Cap.: 350lbs. with GlowGuide Handrail**

5 Step - A7505 Mounting Bracket Height -42"

Max Weight Cap.: 300lbs. with GlowGuide Handrail**


6 Step - A7506 Mounting Bracket Height -49.5"


Max Weight Cap.: 300lbs. with GlowGuide Handrail**

** Maximum GlowStep capacity only achieved when used with GlowGuide handrail system.


Maximum GlowStep capacities are 25 lbs less WITHOUT GlowGuide handrail.


GlowGuide handrail system sold separately

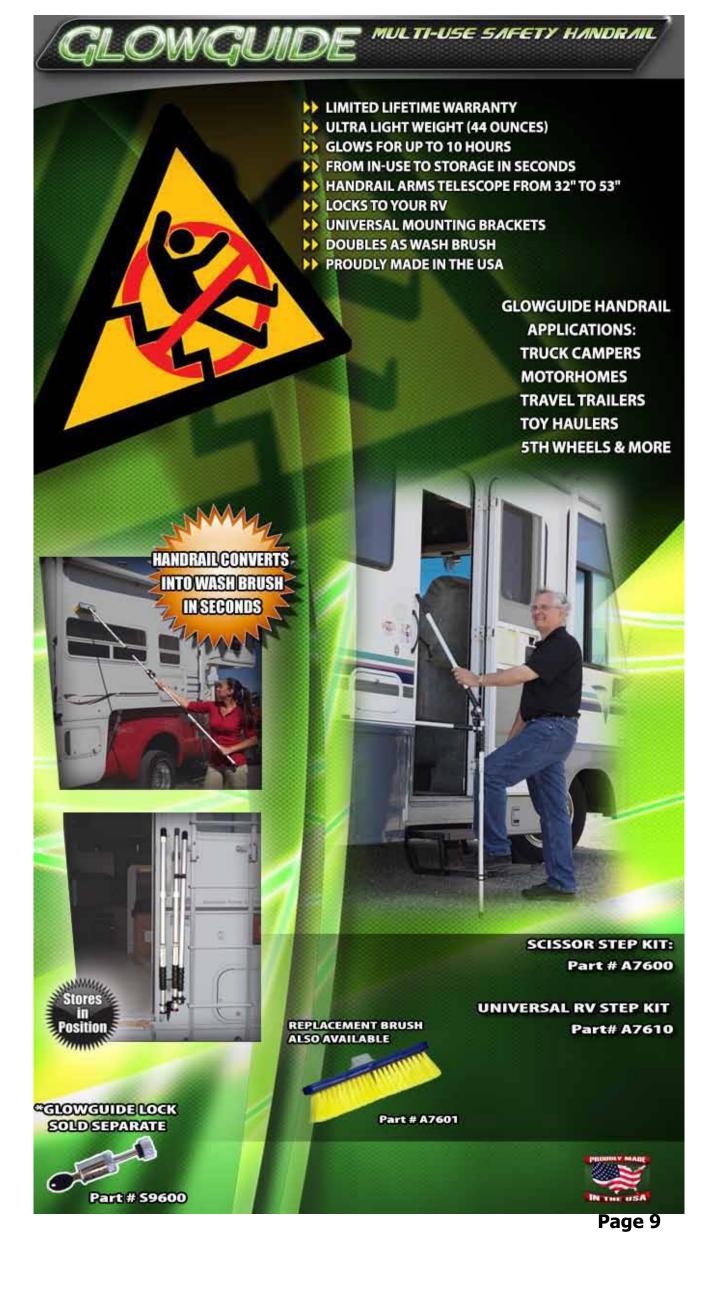

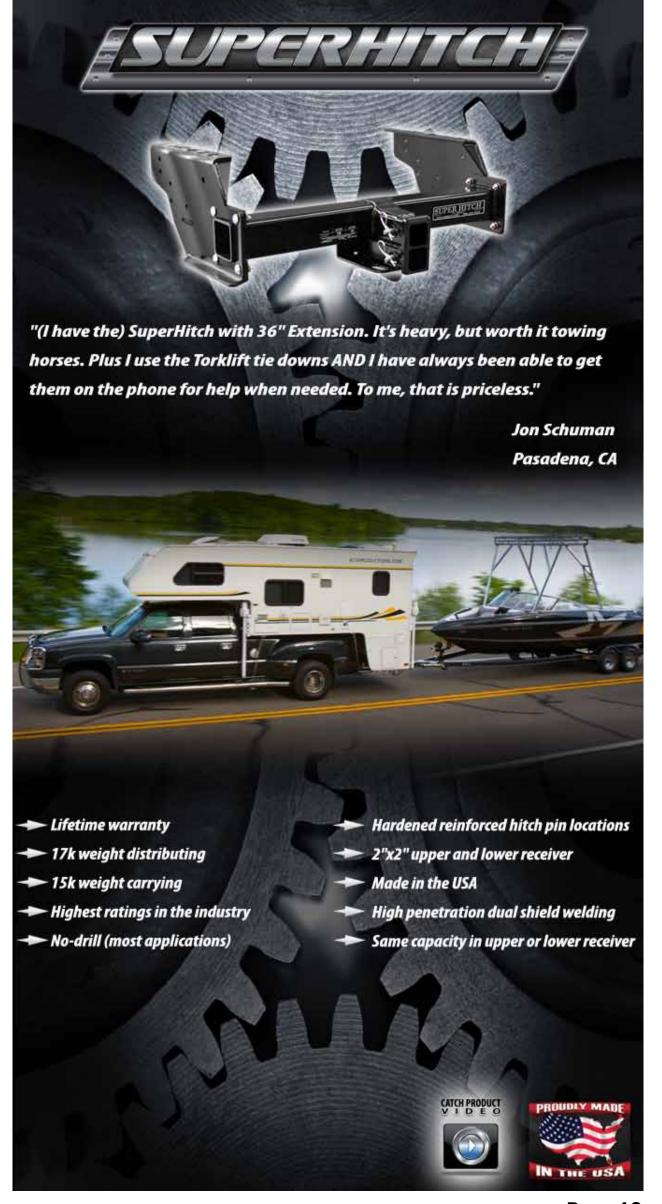



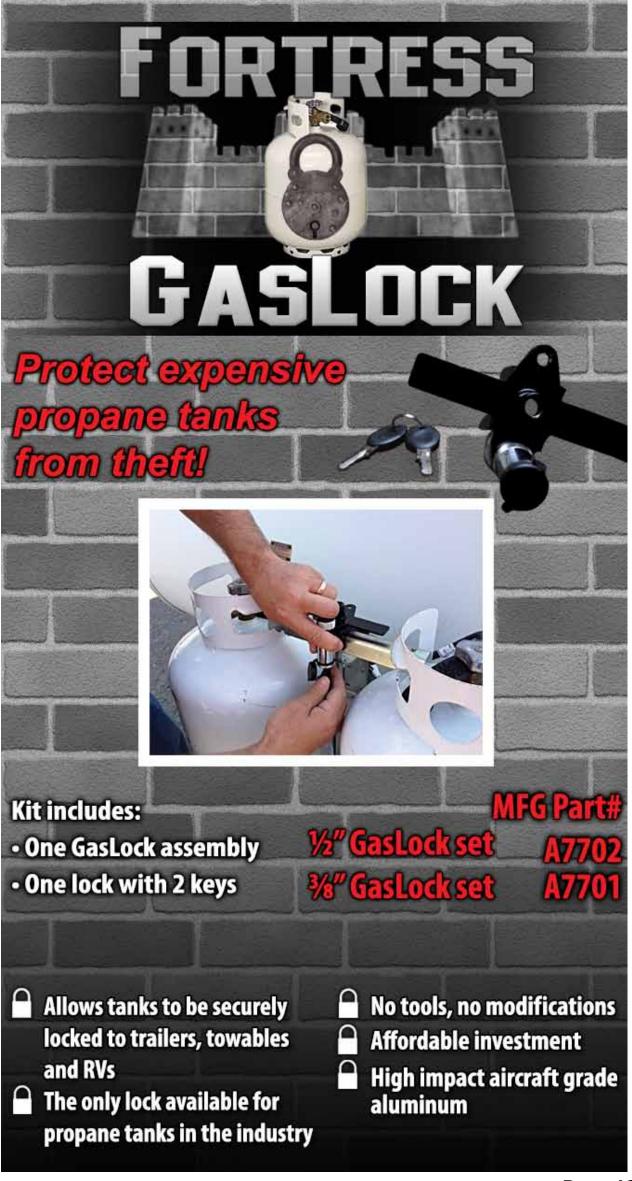







Battery box MFG#: A7700 Lock MFG#: S9501

- # Prevents battery theft
 # Bolts to your trailer tongue
 # Holds up to two spare batteries,
 group 24 or 27
 # Lifetime warranty
 # Heavy gauge diamond plate
 aluminum
 # Slide ton for easy battery accord

- 5 Slide top for easy battery access

- *Kit Includes:
- **5** Battery box
- ₹ Lock

*Batteries not included

Frame Mounted Tie Downs

Leading the camper tie down industry in strength, quality, advanced design and installation. TorkLift TRUE frame mounted tie downs are far superior to all tie down systems available.

The TorkLift system is unique in its design and is patented. Four independent tie down points (with no belly or crossbar) working much like your receiver type trailer hitch as the inserts are removable allowing the system to be virtually undetectable when not in use.

They are designed for each make and model to fit tight to the frame so as not to compromise ground clearance. Tork-Lift tie downs are not universal 'one size fits all' therefore all the problems with correct fit for each particular application have been eliminated.

VISIT WWW.TORKLIFT.COM FOR MORE INFORMATION

Original SuperHitch & SuperHitch Magnum

High strength extended hitch system engineered for safely towing all types of trailers behind your truck and camper. With a max towing capacity of 14,000 lbs. with an extension*, (17,000 lbs. to 20,000 lbs. without*) the Original SuperHitch and Superhitch Magnum are rated the strongest in the industry.




CONTACT YOUR LOCAL DEALER FOR MORE DETAILS

*Weight capacity vary depending on the SuperHitch and SuperTruss extension setup.


TORKLIFT'S BOLT FISHING GUIDE

Your guide to understanding the installation of our frame mounted tie downs.

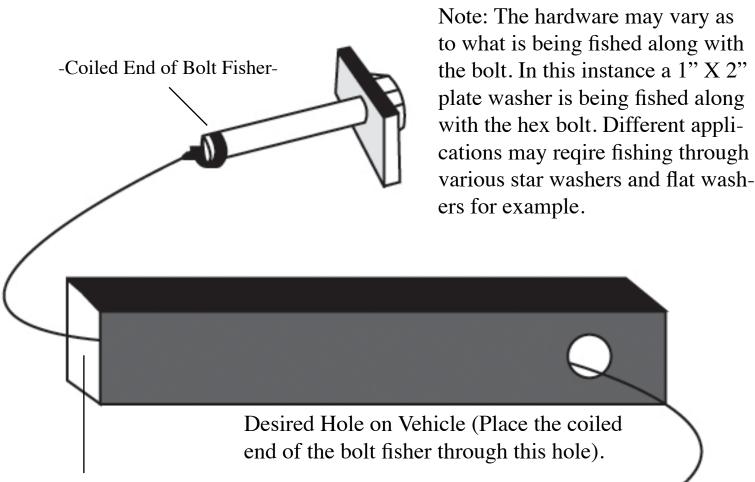

This side of the Bolt Fisher should come out of a hole where the required hardware (for example 1" X 2" plate washer) can pass through.

-Opposite End of Bolt Fisher-

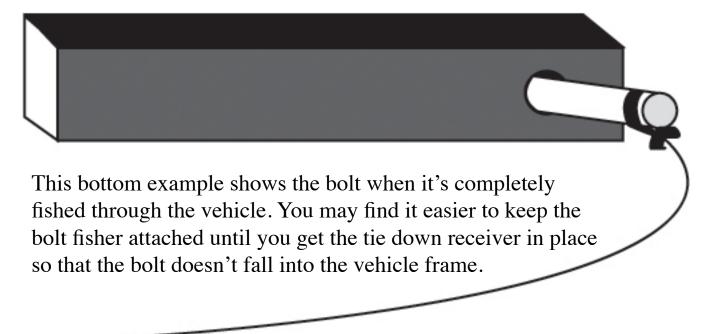


WARNING: PULLING TOO HARD ON THE BOLT FISHER CAN RESULT IN LOST FASTENERS, OR BROKEN BOLT FISHER.

TIEDOWN INSERT INSTALLATION INSTRUCTIONS


On one end of each of your tiedown inserts is a triangular plate referred to by Torklift as a bullet plate. Your tiedown inserts should be installed with the shorter side of the bullet plate facing away from each other, i.e.. The shorter side of the front insert should point to the front of the truck and the shorter side of the rear insert should point towards the rear of the truck.

Once installed, attach the TorkLift directional stickers to the face of the bullet plate on the insert as a reminder.

DRIVERS SIDE FRONT

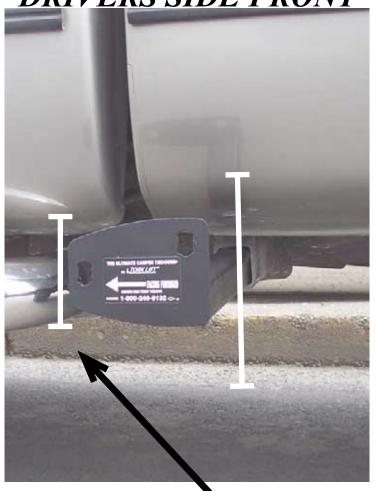

DRIVERS SIDE REAR

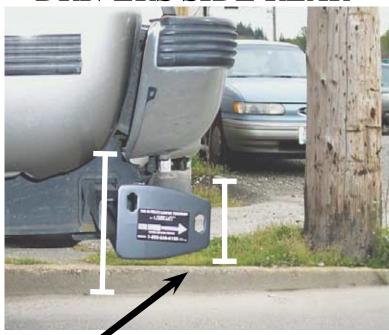

Page 16

SHORTER SIDE

TURNBUCKLE SPRINGLOAD OPTIONS CONTACT YOUR LOCAL DEALER FOR MORE DETAILS


Torklift requires all 4 tiedown points to be spring loaded in order to qualify for our manufacturer's

Industry Exclusive "Camper Anchor" and "Truck Frame" Warranty

BASIC SPRINGLOAD KIT -S9000

Includes 2 External Springload Cylinder Units, 2 Heavy Duty Forged Turnbuckles and 24" of Chain. Also comes with the TorkLift Lifetime Guarantee.





FASTGUNS LEVER ACTION TURNBUCKLES

FOR BED MOUNTED TIEDOWNS S9520-GREY SS / S9521-WHITE SS / S9527-POLISHED SS

FOR FRAME MOUNTED TIE DOWNS S9522-GREY SS/ S9523-WHITE SS/ S9526-POLISHED SS S9529-BLACK SS

FRAME OR BUMPER MOUNTED TIEDOWNS

Includes 2 Stainless Steel Turnbuckles with an Internal "Set" Spring. Available in 2 Lengths and 4 Finishes (Grey, White, Polished Stainless Steel and Black)

Also comes with the TorkLift Lifetime Guarantee.

FASTGUN DERRINGERS Polished Stainless S9528

Transforms Your Pre-Existing Conventional
Turnbuckles into a Lever Action
FastGun Style Turnbuckle.
Kit includes 4 Lever Action Derringers.
Also comes with the TorkLift Lifetime Guarantee.





SPRINGLOAD XL KIT - S9050A

This set includes 2 Long Square Bodied
Turnbuckles with an Internal "Set" Spring.
The Springload XL Kit comes with a High Impact Powdercoated Finish and is compatible with the FastGun Derringer
handles. Also comes with the TorkLift Lifetime Guarantee.

Page 17

RECOMMENDED TRUCK CAMPER INSTALLATION INSTRUCTIONS

When securing any heavy load (especially a camper) in your truck bed, your front tie down points should pull the load forward as much as possible. Some camper anchor points may differ with different manufacturers, as well as the camper jack mounting locations. Your Torklift tie down inserts have offset triangular brackets to increase the angle of pull. These are designed to be used in the front facing forward, and the rear facing rearward but can be used in either front or rear. These recommendations are to be considered and followed as a basic rule of thumb. Obviously there will be some applications where this may not be possible. At a minimum, if opposite pull of both front and rear tiedowns cannot be achieved for whatever reason, you should have at least a forward pull at the front or rear location.

If your camper does not come with Rubber Bumpers on the front lower portion of the camper, installing Rubber Bumpers (Torklift has Rubber Bumpers available Part

A7001) or using a block of wood such as a 2 x 4 in the bed, will prevent the camper from damaging the front bulk head of the truck bed.

Minor movement (or settling) can occur in some incidental harsh driving conditions (on or off road). A rubber bed mat is not a requirement to maintain the lifetime warranty on a Torklift system, but a strong reccommendation simply as a safety precaution to protect the truck bed, the bottom of the camper and to give the camper additional support.

TORKLIFT DOES NOT RECOMMEND: Installing your truck camper in your truck on top of a drop in plastic bed liner!!! The drop in plastic bed liners can slide on top of the truck bed surface, and the camper can slide on top of the slick surface of the bed liner. The liner can also act as a spring causing a trampoline effect increasing vertical truck camper movement, independent of the vehicle, possibly resulting in truck bed, and camper damage!

INSTRUCTIONS FOR FINISH MAINTENANCE OF TORKLIFT PRODUCTS

POWDER COATED STEEL:

To keep your Torklift products looking good follow these guidlines. All steel powder coated Torklift products are sandblasted for maximum adhesion and use a high quality industrial urethane based powder coat. Due to the extreme, harsh, undercar environment that your Torklift products live in, (consistantly sprayed with corrosive road chemicals such as salt, and road debris), Torklift does not warranty the power coated finish.

To minimize corrosion from these factors on powder coated steel products, Torklift recommends regularly cleaning and inspecting the powder coated surface and touching up any affected areas with an enamel or urethane based aerosol paint product. If there are any areas of surface rust, there are also aerosol spray rust converters available on the market that can be used as a preparation to touch-up paint application. These finish maintenance products are available at any automotive parts supplier.

POLISHED STAINLESS STEEL:

Torklift utilizes quality grade 304 stainless steel in our stainless steel polished products. 304 stainless steel is well known for its anti-corrosive properties. However, in some environments such as coastal regions or when coming in contact with some road chemicals, corrosion may occur.

For a quick clean simply use WD40 and a cloth rag. We also recommend occasional polishing of our polished stainless products to maintain their attractive finish. Use an approved stainless steel chrome or aluminum mag wheel polish cleaning product which can be purchased from any automotive parts supplier.

Torklift International Limited Lifetime Warranty Information

1901 Fryar Ave Sumner, WA 98390

Torklift will require proof of purchase to register, with pictures of any defective product before issuing a replacement. Torklift will not register any product without proof of purchase, which can be faxed, scanned, emailed, or mailed to the information provided below. Torklift warrants it's hitches, custom hitch receivers, frame mounted tie downs, turnbuckles, and accessories (excluding wireharnesses which carry a 90 day warranty) from date of purchase against defects in material and workmanship under normal use and service for the ownership life of the original consumer purchaser. ALL COMMERCIAL APPLICATIONS ARE WARRANTED FOR A PERIOD OF 90 DAYS FROM THE DATE OF INSTALLATION/SERVICE. Torklift will replace FREE OF CHARGE any part which proves defective in material or workmanship when presented to Torklift, TRANSPORTATION CHARG-ES PREPAID by purchaser, at the address above. THIS WARRANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLATION OR REPLACEMENT, AS WELLAS INCIDENTAL AND CONSEQUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED. This warranty does not include the finish or paint on our products. Rusting, cracking or peeling of the finish is also excluded. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to Torklift products as a result of misuse, abuse, neglect, accident, improper installation or any use violative of instructions furnished by Torklift or WHEN USED IN ANY COMMERCIAL APPLICATION WILL VOID THE WARRANTY. This warranty gives you specific legal rights, and you may also have rights which vary from state to state. With warranty service, you may be able to go to a small claims court, a state court or a federal district court.

1 TORKLIFT INTERNATIONAL

1901 Fryar Avenue Phone (800) 246-8132 Sumner WA, 98390 Fax (253) 854-8003

Or visit our website: www.TorkLift.com

Dear Valued Customer,

Thank you for making TorkLift your choice for truck, camper packages and accessories for your vehicle. By choosing TorkLift products, you have chosen a company that has been serving the RV industry for nearly 40 years and whose name has become synonomous with strength, quality and advanced design and installation.

Please take a few moments of your time to complete the Product Registration Warranty Card on the next page. When registering your newly purchased TorkLift products, you can be assured that your contact information is secure and that you and your product are getting the attention and respect that you deserve.

Thank you again for choosing TorkLift quality products.

Register for your lifetime warranty and receive a free Torklift International gift.

To Fax: Send copies of the questionnaire, warranty card and receipt to 253-854-8003

To E-mail: Send copies of the questionnaire, warranty card and receipt to warranty@torklift.com

To Mail: Send to Torklift International 1901 Fryar Ave Sumner, Wa 98390



OFFICIAL WARRANTY REGISTRATION CARD

PLEASE FILL OUT THIS FORM COMPLETELY AND RETURN TO TORKLIFT WITHIN 30 DAYS OF PURCHASE ACCOMPANIED BY A COPY OF YOUR ORIGINAL RECEIPT

TODAY'S DATE:
1. PART(S) PURCHASED
PART#: PART#:
PART#: PART#:
2. PURCHASER INFORMATION
NAME:
ADDRESS:
CITY: STATE: ZIP / POSTAL CODE:
PHONE:_(EMAIL:
3. TRUCK INFORMATION
YEAR: MAKE:
MODEL: BED LENGTH:
4. CAMPER INFORMATION
YEAR: MAKE: MODEL:
5. DEALER INFORMATION
PURCHASED FROM:
ADDRESS:
CITY: STATE: ZIP / POSTAL:
INSTALLED BY: OWNER ABOVE DEALER ANOTHER DEALER
IF ANOTHER DEALER, WHO: