

FURRION

5" OUTDOOR MARINE SPEAKER WITH MOUNT

FMS5X

FMS5B

FMS5W



UV RESISTANT




IP55

WATERPROOF

- Audio optimized for recreational vehicles
- PP reinforced cone extends frequency response and minimizes distortion; this controls rigidity and internal damping, delivering high definition audio with pure, distinct sound



FMS5X | 5" OUTDOOR MARINE SPEAKER WITH MOUNT

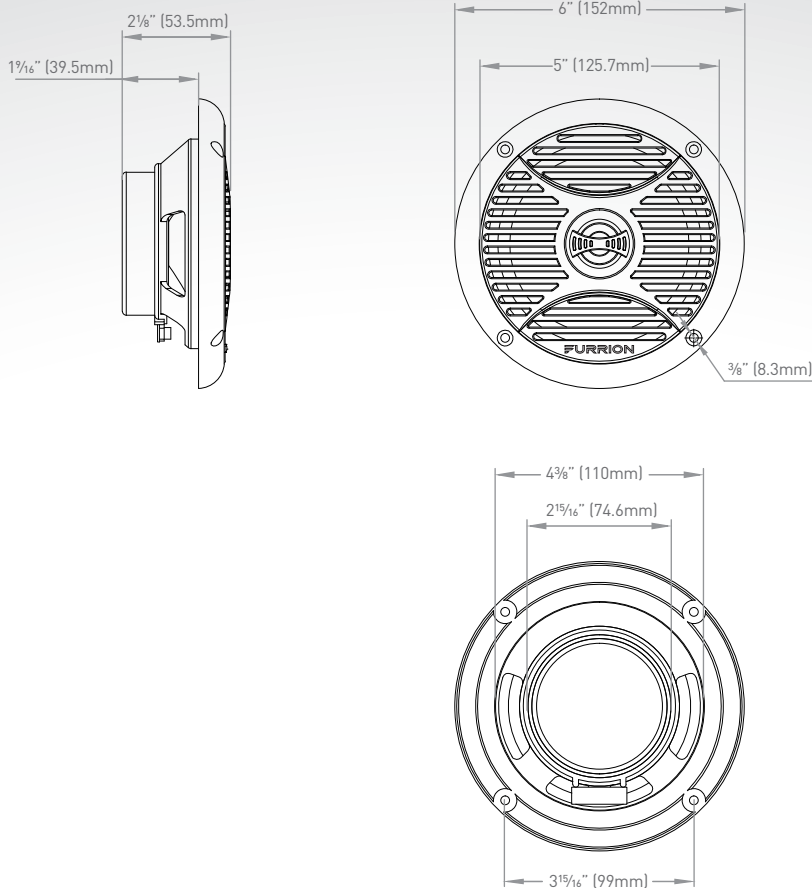

Specifications

Voice Coil Electro Impedance	4Ω @ 1kHz 1V
Resonance Frequency	85±20% Hz
Output Sound Pressure Level	88dB
Characteristic Sensitivity	±3dB
Effective Frequency Band	Fo~18kHz
Harmonic Distortion	5% < 1W
	≥ 130~10kHz
Power Usage	Left "+", Right "-"
Temperature Range	-20°C to 70°C / -4°F to 158°F
Max Power	30W
Product Compatibility	Furrion stereo products
Ingress Protection	IP55

Packaging Information

Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (L x H x W)	6 3/16" x 6 3/16" x 5" (157 x 156 x 127mm)
Individual Packaging Gross Weight (kg/lbs)	0.37/0.81
Individual Packaging Net Weight (kg/lbs)	0.34/0.74

Master Carton

Packaging Type	Master Carton Box
Quantity Per Box (pcs)	32
Master Carton Dimensions (L x H x W)	24 13/16" x 12 13/16" x 10 5/8" (630 x 325 x 270mm)
Master Carton Gross Weight (kg/lbs)	12.5/27.6
Master Carton Net Weight (kg/lbs)	10.6/23.4