


2" bore x 13" stroke x 1 ½" rod.

Max. operating pressure is 3000psi
Paint black
0.001 Min chrome plated rod.
Operating temperature

Operating temperature range: -40°F to 200°F Cylinder should be shipped with steel o-ring plugs in each port.

See sheet two for rod end details.

Formula Road 55169 COUNTY ROAD 3	#	REVISIONS	BY:	DATE:		TITLE	7 0 4 1 1 1 5 5 5	USED ON:	
Equalizer S5169 COUNTY ROAD 3 ELKHART, IN 46515	\Box						<u>3 CYLINDER</u> le Imaterial	4 POINT LEVE	ELING
NOTICE — This drawing, including principles of design, is the property of Days Corporation, Elkhart, Indiana, with the agreement that it is not to be reproduced, copied, or loaned in any manner that may constitute a detriment directly or indirectly to Days Corporation. Acceptance of this will be construed as an agreement of the above.	\vdash		_		.XXX ± 0.010 .XX ± 0.010	A 1: 1 — — — —			
	\vdash		\dashv		.x ± 0.030	DRW BY:		YART NAME: CYLINDER—SL 2 X	13 IP
						APP'D BY		AGF: DWG NO.:	RFV:
						—	- '	OF 2 3142A	-

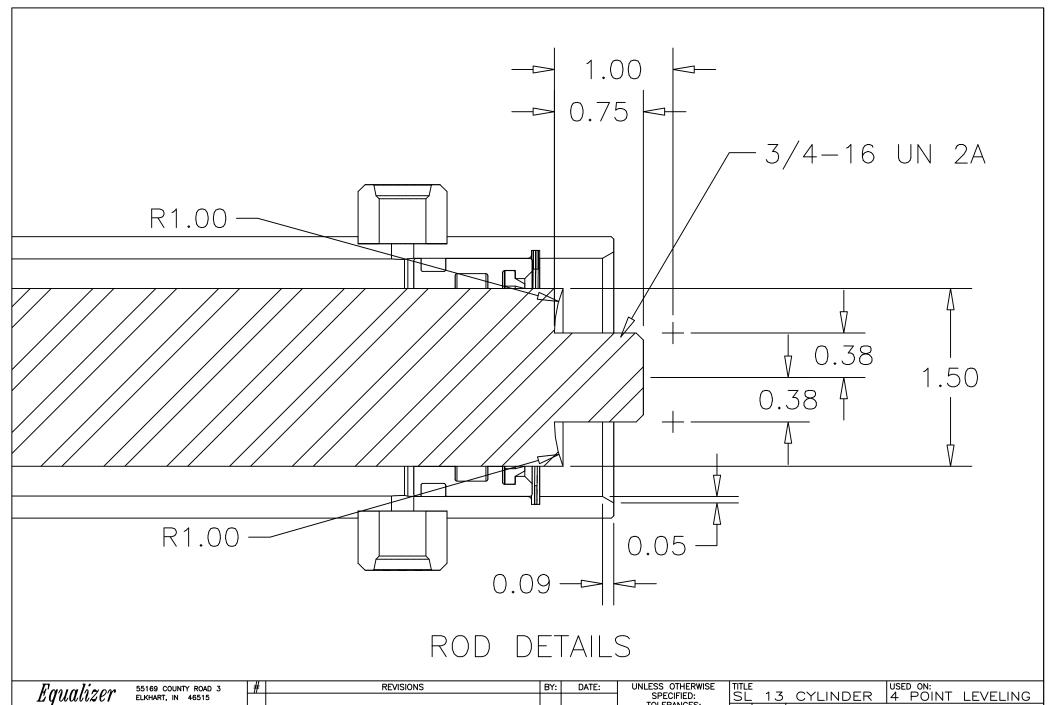

Formalia com 55169 COUNTY ROAD 3	L#L	REVISIONS	BY:	DATE:		TITLE	7 004 1010 5	USED ON:
Equalizer S5169 COUNTY ROAD 3 ELKHART, IN 46515					SPECIFIED: TOLERANCES:		3 CYLINDE	R 4 POINT LEVELING
*					.XXX ± 0.010	SIZE SCA	LE MATERIAL	
NOTICE - This drawing, including principles of design, is the					.xx ± 0.010	A 1:		
property of Days Corporation, Elkhart, Indiana, with the agreement that it is not to be reproduced, copied, or loaned					, x ± 0.000	DRW BY:		PART NAME:
in any manner that may constitute a detriment directly or	\vdash				ANG. ± 1/2°	SJ		CYLINDER-SL 2 X 13 LP
indirectly to Days Corporation. Acceptance of this will be	\vdash		\vdash		REMOVE ALL BURRS AND		DATE:	PAGE: DWG NO.: REV:
construed as an agreement of the above.					SHARP EDGES .015 MAX	l —	_	2 OF 2 3142A