
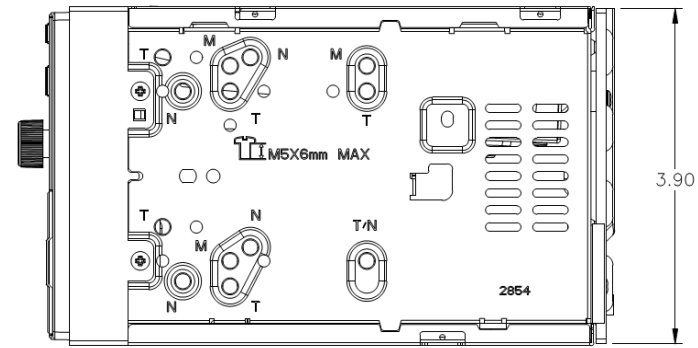


**JRV9000**

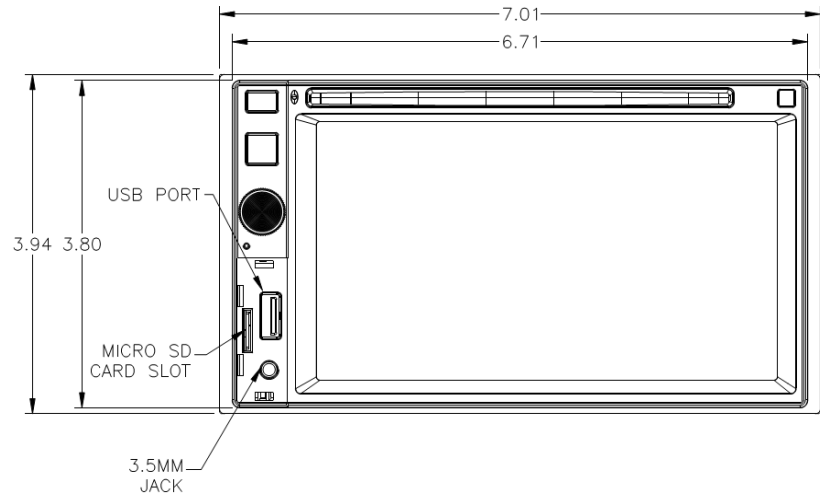

**Features:**

- Japanese ISO 2.0-DIN Chassis with Fixed Face, Trim Rings and Mounting Sleeve
- 6.2" TFT LCD Touch Panel
- 3 Wire Power System (Batt, ACC, GND)
- Multi-color RGB LED Backlit Controls can be user customized
- 3-Camera input with auto-trigger (CAM1 w/audio)
- Adjustable Display Settings (Brightness, Contrast, Color) for Camera Modes
- Electronic AM/FM Tuner with RBDS (W/PTY search features)
- Auto-Store (AS) and Preset Scan (PS) 18 FM presets / 12 AM presets)
- MHL/ HDMI Smart Phone Connectivity
- iGo Primo NextGen GPS Navigation and Mapping
- Bluetooth (A2DP; AVRCP; HFP; PBAP)
- DVD player with 6 second ESP. Plays movie and audio CD
- USB 2.0 (front panel connection) for MP3 and WMA playback
- Aux Input (Rear Chassis A/V RCA and Front Panel Audio 3.5mm)
- SiriusXM Ready (requires SXV200 tuner purchased separately)
- Connects to iPod / iPhone via USB
- 10 Band EQ w/ Presets: Optimal, Classic, Flat, Rock, Pop, Jazz, Techno
- IR Wireless Remote Ready (REMNAV sold separately)
- 4 x 50W Audio Output Power
- Handheld IR Remote Control
- Rear Channel Pre-Amp Audio Output (RCA)
- Low Level Sub-Woofer Output (RCA)
- Audio Mute
- Beep Confirmation Tone (selectable on/off)
- Clock
- Selectable Standby Display Mode

**Specifications:**

**General Specifications**

Power System	12V DC	
Operating Voltage Range	10 V to 16 V	
Current Draw @ 12V	Idle	8.0mA
	Nominal	3.0A
	Maximum	10.5A
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	95%	
Product Weight (unpacked)	5 1/2 lb	



**Performance Specifications**

FM Sensitivity	1.4 uV	
AM Sensitivity	22 uV	
CD Frequency Response	20 Hz to 20KHz	
CD Signal to Noise	70 dB	
CD Skip Threshold (Random Freq. Profile)	>1.6 g	
Compatible CD Formats	Audio CD, CD-R, CD-R/W, MP3, WMA	
Output Power	RMS	19 W @ 10% THD
	Maximum	50W x 4
Total Harmonic Distortion	0.5%	

**LCD Specifications**

Brightness	400 cd/ml
Contrast Ratio	350
Resolution	1200 X 234


**IO's and Connections**

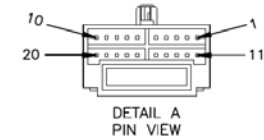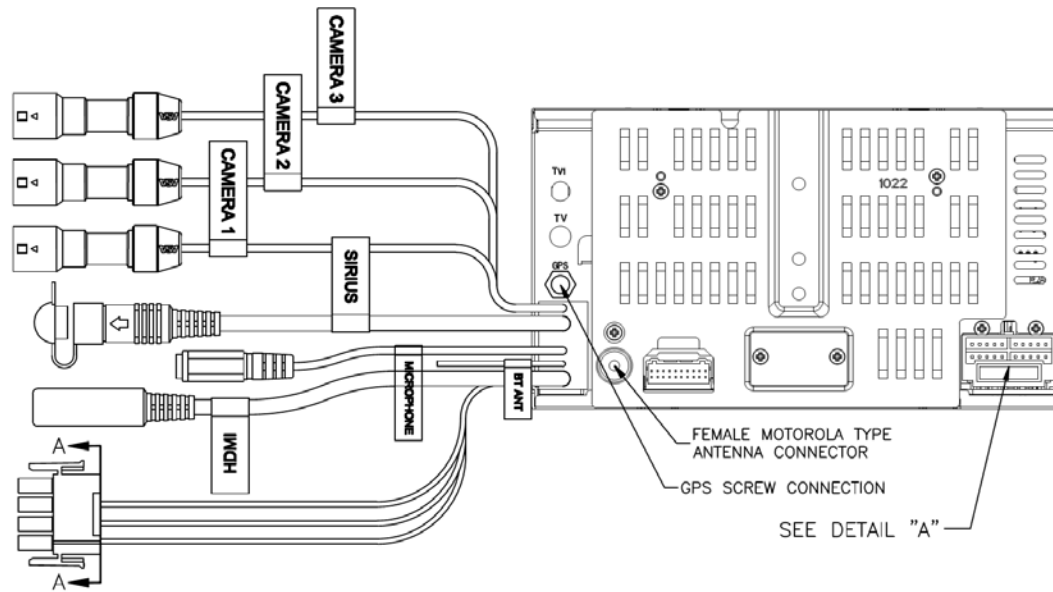

PIN NO.	WIRE COLOR	DESCRIPTION
1	GRAY/BLACK	RIGHT FRONT SPEAKER (-)
2	GRAY	RIGHT FRONT SPEAKER (+)
3	PURPLE	RIGHT REAR SPEAKER (+)
4	PURPLE/BLACK	RIGHT REAR SPEAKER (-)
5	PINK	BRAKE
6	GREEN	LEFT REAR SPEAKER (+)
7	GREEN/BLACK	LEFT REAR SPEAKER (-)
8	RED	ACC / IGNITION
9	EMPTY	NO CONNECTION
10	WHITE/PURPLE	KEY A
11	WHITE	LEFT FRONT SPEAKER (+)
12	WHITE/BLACK	LEFT FRONT SPEAKER (-)
13	ORANGE	ILLUMINATION
14	BLUE	POWER ANT & AMP. CONT
15	YELLOW	BATTERY 12V (+)
16	BLACK	GROUND
17	GREEN/WHITE	REVERSE
18	EMPTY	NO CONNECTION
19	BROWN/BLACK	KEY GND
20	WHITE/BROWN	KEY B

VIEW C-C  
WIRE INSERTION VIEW

PIN NO.	WIRE COLOR	DESCRIPTION
1	BLUE	CH1 TRIGGER
2	BROWN	CH2 TRIGGER
3	GREEN	CH3 TRIGGER
4	EMPTY	NO CONNECTION

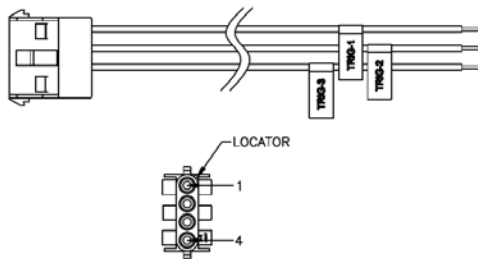

VIEW C-C  
WIRE INSERTION VIEW

PIN NO.	WIRE COLOR	DESCRIPTION
1	BLUE	CAMERA 1 TRIGGER
2	BROWN	CAMERA 2 TRIGGER
3	GREEN	CAMERA 3 TRIGGER
4	EMPTY	NO CONNECTION

