

Instructions: Deluxe Toy Hauler Cover

▲WARNING:

Installation is best done with two people. **Never install on a windy day or when the roof is slippery. Please take care when you are on a ladder or the roof.**

CAUTION

Please consult your RV owners manual.

Tools Needed:

Scissors
Matches or lighter (optional)
Screwdriver (usually Phillips head) for roof antenna.

Installation

Note: Your cover has been packed so that when unrolled on the roof it is in the proper position for installation.

1. Cover or tape any sharp edges on your Toy Hauler that could wear against your cover. Be sure to lower any roof antennas.


2. Carefully climb up on the roof and take your cover out of its storage bag. Place the rolled-up cover at the front center of the roof and unroll down the center of your Toy Hauler.

3. Starting at the front, unfold the cover from the center outwards. Continue unfolding the cover, letting it fall over the



sides of your Toy Hauler. Make sure the corners of the cover are at the corners of your Toy Hauler. Climb down and pull the back end of the cover down the back of your Toy Hauler. Finish by zipping all the panels closed on your cover then pull the elasticized corners around the bottom edge.

4. Climb down the ladder and locate the ladder cap. (The cap helps keep the top of the ladder from stressing the cover).

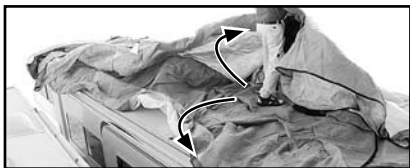

Fit it over the ladder top and attach it to the rungs with the hook and loop straps. Pull the cover down the remaining area of your Toy Hauler.


5. Tie an end of one of the supplied pre-cut ropes onto one of the D-rings along the bottom hem. Put a small rock in the provided toss bag, close the top and tie the free end of the rope to the bag D-ring. Now toss the bag and rope under your Toy Hauler to the D-ring on the opposite side. Take the rope off the bag and tie it to the D-ring. Repeat with the remaining D-rings.

6. Adjust the strap length on the white tension panels across the front and back to fit your Toy Hauler. Don't over tighten—the straps should be snug, not drum tight. To attach the straps into the side-release buckles just insert the clip into the buckle. To release the buckle press the buttons on both sides and pull the clip out of the buckle.


Note: If your Toy Hauler is **not** a 5th wheel-type trailer, your installation is complete. If your Toy Hauler is a 5th Wheel-type trailer, continue with the next two steps.

7. Once the fit of the overhang of the cover is correctly adjusted, locate the side zippers on the front of the cover and zip to the **bottom of the overhang** of your Toy Hauler. Locate the D-rings sewn in to reinforcement flaps in the sections that fold in under the nose of your Toy Hauler. Attach a supplied pre-cut section of rope to the D-rings on the sides [1] of the cover (not under the overhang) as shown below. Tighten the rope and tie it off onto the D-rings located opposite each other. Repeat with the lower D-ring [2].

8. Locate the remaining D-rings on the section of the cover under the nose of your Toy

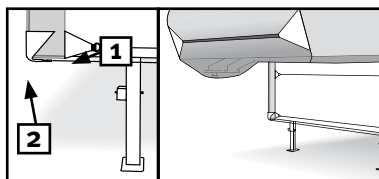

Hauler Using a “shoelace” system, tie one end of a pre-cut section of rope to a D-ring and thread it through the remaining D-rings and cinch



them all tight. Tie off the rope onto the last open D-ring. Some adjustment might be necessary in order to get them all snug.

Use and Storage

Your cover can be unzipped for access to the front, passenger side and rear. The panels can be rolled up and held in place with the hook and loop straps toward the top of each panel.

A handy storage bag is provided. To fit fold and roll the cover tightly rather than stuffing it. Never store a wet cover in the storage bag or confined area as the cover can be damaged by mildew.

Care

Spot clean with water, a mild soap and a sponge. Don't use abrasive cleaners or brushes.

Three Year Limited Warranty

If cover fails due to a defect in workmanship and materials within three years of the date of purchase Classic Accessories will repair or replace it free of charge.

Trailering or towing your Toy Hauler with your cover on will invalidate the warranty.

This warranty gives you specific rights and you may also have other rights which vary from state to state.



WE COVER YOUR GEAR®

Classic Accessories, Inc.
Kent, WA, USA 98032
www.classicaccessories.com