Installation Instructions TC6501 Bracket Kit

The TC35270 steering control unit is recommended for use with this bracket kit.

1. Set front wheels of vehicle in straight ahead position.

BLUE OX°

2. Remove nuts from axle spring rear U-bolt on driver's side.

3. Install Item 2 on to axle and reinstall the existing washers and nuts and tighten securely.

4. Install Item 3 on tie rod using items 4 and 7 (choose the appropriate U-Bolts for your application), according to drawing on page 2. DO NOT TIGHTEN. Item 3 may be rotated or flipped to insure steering control (Item 1) remains parallel to the ground.

5. Install solenoid end of Item 1 to top of Anchor Bracket (Item 2) with Items 5, 6, 8 and 9, according to drawing on page 2.

6. Install small end of TruCenter unit (Item 1) to top of Tie Rod Bracket with Items 5, 6, 8 and 9, see drawing on page 2. Allow enough slack for the Tie Rod Bracket (Item 3) to rotate for alignment to the tie rod. DO NOT FULLY TIGHTEN.

7. Tighten Items 5, 6, 8, and 9 on Anchor Bracket (Item 2) to 180-200 foot pounds of torque.

8. Tighten Items 4 and 7 on the Tie Rod Bracket (Item 3) to 25-35 foot pounds of torque.

9. Tighten Items 5, 6, 8, and 9 on the Tie Rod Bracket (Item 3) to 180-200 foot pounds of torque.

Check to be sure installed unit clears all other parts of vehicle by turning steering wheel to both extreme right and left positions. If unit scrapes or binds at any point, make necessary corrections by rotating unit on tie rod to obtain necessary clearance.

10. Install TruCenter Steering Control wiring according to instructions included in its package.

11. DEALER OR INSTALLER: BE CERTAIN USER RECEIVES INSTRUCTION SHEET.

Insure that you use the proper TruCenter steering control unit for your application. Using too strong or too weak of a steering control may result in improper or undesirable handling.


Product Safety Policy Statement

It is, and shall continue to be, a primary objective of Blue Ox Towing Products to provide customers with safe and reliable products. Blue Ox will, and has, established safety procedures in product design, manufacture, promotion and sales; and will coordinate efforts to promote customer safety to the greatest extent possible. Each department has primary responsibility for the promotion of safety under the guidelines of the Product Safety Committee.

© 2003 Blue Ox Division Automatic Equipment Mfg. Co. One Mill Road, Industrial Park Pender, Nebraska 68047 Phone 402-385-3051 Fax 402-385-3360 www.blueox.us

9/8/08

Tools Required

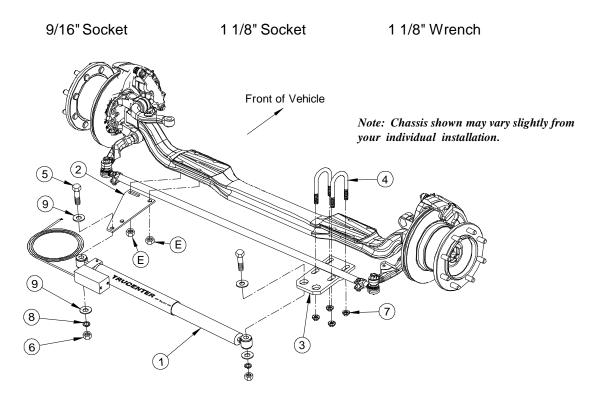

Parts List

Ref. No.	Qty.	Part No.	Description
1*	1		TruCenter, Steering Control
2	1	101-6418	Plate, Anchor Bracket
3	1	102-6344	Bracket, Tie Rod
4	2	201-0718	U-Bolt, 3/8-16 x 1.75, Grd 5, ZP
4	2	201-0719	U-Bolts, 3/8-16 x 1.875, Grd 5, ZP
4	2	201-0720	U-Bolts, 3/8-16 x 2.00, Grd 5, ZP
5*	2		Bolt, 3/4-10 X 3 1/2, 1.59In Flange
6*	2	202-0180	Nut,3/4-10, 1.59 Flange, Grd. 8, ZP
7	4	202-0174	
8*	2		
9*	8	203-0007	
E	2		Existing Hardware
		*ite	ems are purchased separately in the TC35270 steering control kit.

IMPORTANT: Use only genuine factory replacement parts on your bracket kit. Do not substitute homemade or nontypical parts. If a bolt is lost or in need of replacement, for your safety and the preservation of your bracket kit, be sure to use a replacement bolt of the same grade. Repair parts may be ordered through your nearest **Blue Ox** dealer or distributor.



© 2003 Blue Ox Division Automatic Equipment Mfg. Co. One Mill Road, Industrial Park Pender, Nebraska 68047 Phone 402-385-3051 Fax 402-385-3360 www.blueox.us

292-6078

9/8/08