

Minor movement (or settling) can occur in some incidental harsh driving conditions (on or off road).

A rubber bed mat is not a requirement to maintain the lifetime warranty on a Torklift system, but a strong recommendation, simply as a safety precaution to protect the truck bed, the bottom of the camper and to give the camper additional support.

Warning!!

TORKLIFT <u>DOES NOT</u> RECOMMEND: Installing your truck camper in your truck on top of a drop in plastic bed liner!!! <u>THIS WILL VOID YOUR WARRANTY</u>!

The drop in plastic bed liners can slide on top of the truck bed surface, and the camper can slide on top of the slick surface of the bed liner. The liner can also act as a spring causing a trampoline effect increasing vertical truck camper movement, independent of the vehicle, possibly resulting in truck bed damage and/or camper damage!



REVISED vers2 BY: MWP 11/09/2012

# **TECH SUPPORT (800) 246-8132**

AFTER INSTALL, PLEASE GIVE THIS BOOKLET TO YOUR CUSTOMER

#### **D2102 PARTS INVENTORY**

2 - TIE DOWN RECEIVERS	2	- 1/2" LOCK WASHERS
2 - STRAIGHT INSERTS	2	- 1/2" NUTS
2 - 1/2" X 1 1/2" HEX BOLTS	2	- 2" X 4" PLATE WASHERS
2 - 1 1/8" X 2 1/4" OVAL PLATES	2	- 1/4" PINS

**1.** Locate and inventory all parts to become familiar with all brackets

**2.** Start with the passenger side first. Remove front leaf spring nut only DO NOT REMOVE BOLT! (**as seen in photo A**). Place the oval insert washer into position (**as seen in photo B**). Make sure the oval insert washer seats properly in the oval hole.

**3.** Install the tie down receiver onto leaf spring hanger bolt as shown in **photo C**. Do not tighten the nut at this time.

**4.** Using the supplied 1/2" x 1 1/2" bolt and 2" x 4" plate washers, drop in from the top of the leaf spring hanger so the bolt installs through the oval insert washer and into the tie down receiver. As shown in **photo D**, place a 1/2" lock washer and nut on the fastener.

**5.** Apply a thread locker such as blue loctite onto the factory spring bolt and nut. Tighten the factory spring bolt and the installed bolt. (It is very important that the oval insert washer seat inside the cut out in the leaf spring hanger). The 2" x 4" plate washer will begin bending as you tighten the nut. Be sure that you tighten this bolt until the plate seats flush with the inside of the spring hanger and sandwiches the oval plate between the 2" x 4" plate washer and the tube of the tie down receiver, as seen in photo **D & E**. Tighten 1/2" fasteners to 60 ft-lbs. Tighten factory spring bolt to 120 ft lbs.

**6.** Find one insert and 1/4" pin and put the insert into the tie down receiver using the hole in the insert. Install the 1/4" pin.

\*<u>NOTE</u>: The included tie down inserts come with 2 predrilled pin hole locations. When hooking up your camper, either hole may be used providing there is a <u>MINIMUM</u> of 2" clearance between the chain/turnbuckle attaching assembly and the truck bed wall.

7. You should have at least 1" clearance between the insert and the lip of the truck box.

\*<u>NOTE:</u> THE INCLUDED TIE DOWN INSERTS COME WITH 2 PREDRILLED PIN HOLE LOCATIONS, WHEN HOOKING UP YOUR CAMPER, EITHER HOLE MAY BE USED PROVIDING THERE IS A <u>MINIMUM</u> OF 2" CLEARANCE BETWEEN THE CHAIN/TURNBUCKLE ATTACHING ASSEMBLY AND THE TRUCK BED WALL. THERE ARE ALSO 2 PRE-PUNCHED HOLES LOCATED ON THE TRIANGULAR BUL-LET PLATE ON THE END OF EACH TIE DOWN INSERT, AND WHILE EITHER OF THE 2 HOLES CAN BE USED, THE HOLE THAT PROVIDES THE GREATEST ANGLE IS PREFERRED.

8. Repeat steps 1-7 for driver's side installation.

# INSTALLATION DIAGRAM





### РНОТО С

# **INSTALLATION DIAGRAM (CONT.)**



# INSTALLATION DIAGRAM (CONT.)



# **INSTRUCTIONS FOR MAINTENANCE OF POLISHED STAINLESS STEEL PRODUCTS**



TorkLift utilizes quality grade 304 stainless steel in this product.

304 stainless steel is well known for its anti corrosive properties, however in some environments such as coastal regions or when in contact with some road chemicals, corrosion may occur.

We recommend occasional polishing of our product to maintain its attractive finish. Use an approved stainless steel cleaning/polishing product which can be purchased from any automotive supplier.



# PART NUMBER: A7009





"I love this thing. Its light and the steps glow in the dark. It folds up nice and I can store it inside one of my storage bays. What a difference going up and down a decent set of steps compared to those 'death trap' steps that the factories put on."

-Kerry Stark, PA

>> LIFETIME WARRANTY

 GLOWS IN THE DARK FOR 10 HOURS WITH ONLY 5 MINUTES OF LIGHT EXPOSURE

- SELF ILLUMINATING STEPS NO BATTERIES
- SAFELY ENTER AND EXIT YOUR RV AFTER DARK
- SUREGRIP" STEP TREAD NO GRIP TAPE
- STORES IN POSITION
- LOCKABLE
- EXCLUSIVE: ADJUSTES TO BASEMENT MODEL CAMPERS
- 100% ALUMINUM AND STAINLESS STEEL

STAINLESS BOLTED HINGES ALLOW FOR EASY STEP ADDITION OR REMOVAL (ADD-A-STEP KIT PART # A7501)

Glow Step Lock

**Y** 

Part #: A7509

OCK


Add-a-Step

Part#8A7/501

IN THE USA

2 Step - A7502	Mounting Bracket Height -19.5"	Max Weight Cap.: 350lbs. with GlowGuide Handrail**
3 Step - A7503	Mounting Bracket Height -27"	Max Weight Cap.: 350lbs. with GlowGuide Handrail**
4 Step - A7504	Mounting Bracket Height -34.5"	Max Weight Cap.: 350lbs. with GlowGuide Handrail**
5 Step - A7505	Mounting Bracket Height -42"	Max Weight Cap.: 300lbs. with GlowGuide Handrail**
6 Step - A7506	Mounting Bracket Height -49.5"	Max Weight Cap.: 300lbs. with GlowGuide Handrail**

\*\* Maximum GlowStep capacity only achieved when used with GlowGuide handrail system. Maximum GlowStep capacities are 25 lbs less WITHOUT GlowGuide handrail. GlowGuide handrail system sold separately

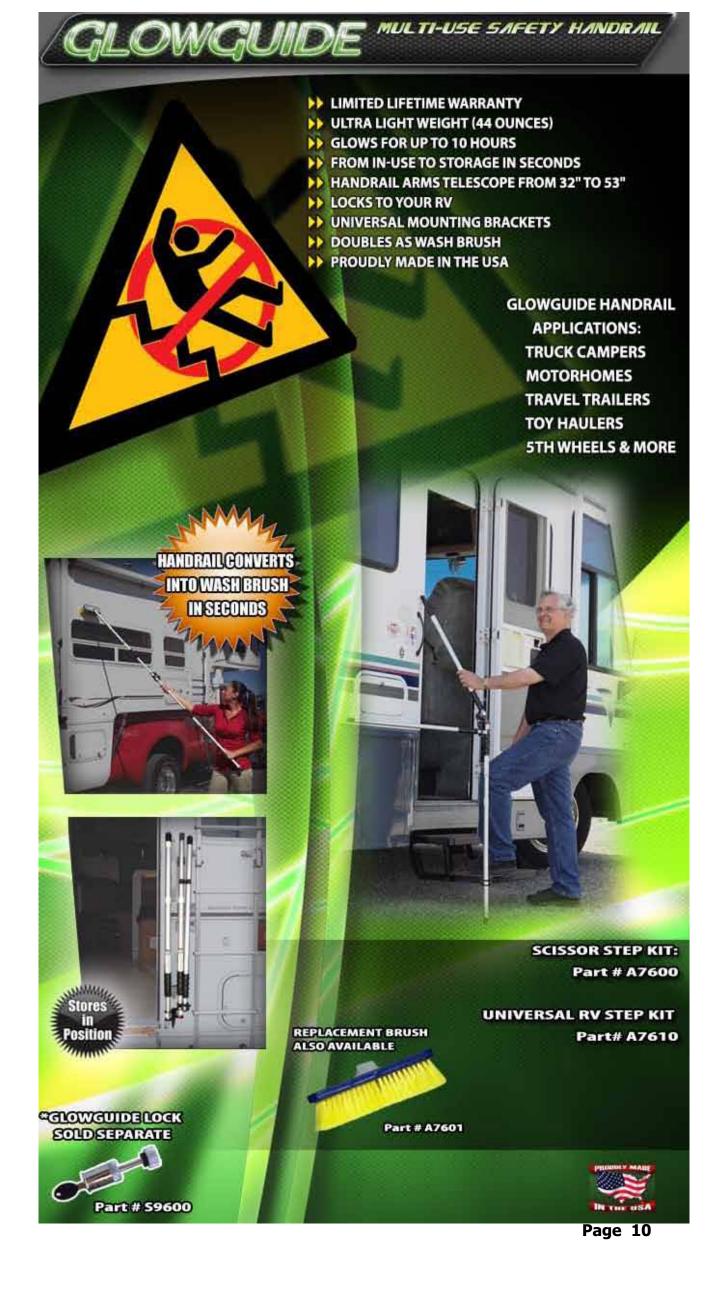



"(I have the) SuperHitch with 36" Extension. It's heavy, but worth it towing horses. Plus I use the Torklift tie downs AND I have always been able to get them on the phone for help when needed. To me, that is priceless."

> Jon Schuman Pasadena, CA

- Lifetime warranty
   17k weight distributing
- ✤ 15k weight carrying
- Highest ratings in the industry
- No-drill (most applications)
- Hardened reinforced hitch pin locations
   2"x2" upper and lower receiver
   Made in the USA
   High penetration dual shield welding
   Same capacity in upper or lower receiver





# Hiddenpover

# Under bed auxiliary battery mount

 Yellow to show contrast, product is black

MFG #: Ford A7703 Other applications coming soon

- Add additional batteries under your truck bed
- No-drill / easy install
- Attaches and detaches quickly for battery service
- Securely clamps to truck frame
- Hidden when in use
- No loss of ground clearance
- Lifetime warranty
- High impact powder coat black
- Works with group 24 and 27 batteries

Kit Includes:

- Battery box frame mount
- Mounting fasteners
- 2 Quick disconnect 10 to 8 gauge connectors male & female 12 volt

Comes with Group 27 battery box - A7727 Comes with Group 24 battery box - A7724 No battery box included - A7703

IN THE USA





Kit includes:

Protect expensive


propane tanks

from theft!

One GasLock assembly
One lock with 2 keys

MFG Part# 1/2" GasLock set A7702 3/8" GasLock set A7701

- Allows tanks to be securely locked to trailers, towables and RVs
- The only lock available for propane tanks in the industry
- No tools, no modifications
  - Affordable investment
- High impact aircraft grade aluminum

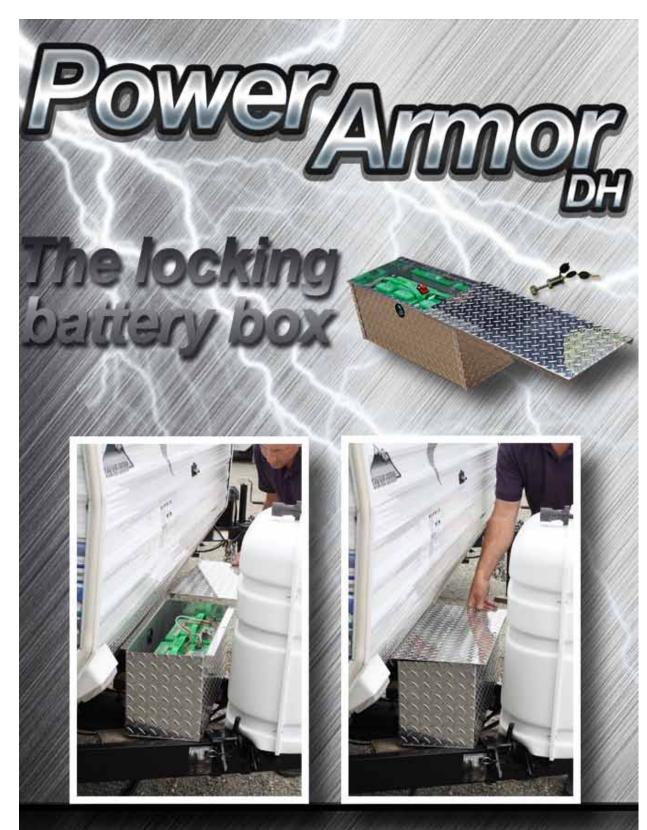

# Battery box MFG#: A7700 Lock MFG#: \$9501

- <sup>#</sup> Prevents battery theft
  <sup>#</sup> Bolts to your trailer tongue
  <sup>#</sup> Holds up to two spare batteries, group 24 or 27
  <sup>#</sup> Lifetime warranty
  <sup>#</sup> Heavy gauge diamond plate aluminum
  <sup>#</sup> Slide ton for each better

- For easy battery access

\*Kit Includes: **F** Battery box **FLock** 

\*Batteries not included

# Frame Mounted Tie Downs

Leading the camper tie down industry in strength, quality, advanced design and installation. TorkLift TRUE frame mounted tie downs are far superior to all tie down systems available.

The TorkLift system is unique in its design and is patented. Four independent tie down points (with no belly or crossbar) working much like your receiver type trailer hitch as the inserts are removable allowing the system to be virtually

undetectable when not in use.

They are designed for each make and

model to fit tight to the frame so as not to compromise ground clearance. Tork-Lift tie downs are not universal 'one size fits all' therefore all the problems with correct fit for each particular application have been eliminated.

#### VISIT WWW.TORKLIFT.COM FOR MORE INFORMATION

# Original SuperHitch & SuperHitch Magnum


High strength extended hitch system engineered for safely towing all types of trailers behind your truck and camper. With a max towing capacity of 14,000 lbs. with an extension\* , (17,000 lbs. to 20,000 lbs. without\*) the Original SuperHitch and SuperHitch Magnum are rated the strongest in the industry.



**CONTACT YOUR LOCAL DEALER FOR MORE DETAILS** \*Weight capacity vary depending on the SuperHitch and SuperTruss extension setup.

# **TORKLIFT'S BOLT FISHING GUIDE**


Your guide to understanding the installation of our frame mounted tie downs.

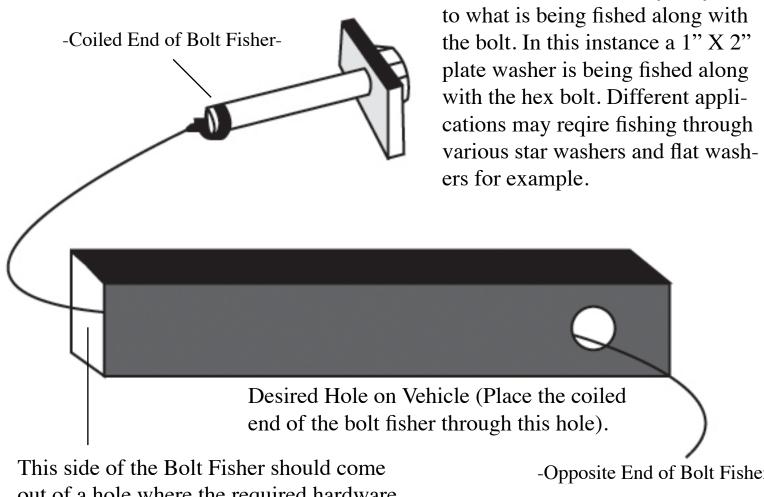

out of a hole where the required hardware (for example 1" X 2" plate washer) can pass through.

-Opposite End of Bolt Fisher-

Note: The hardware may vary as

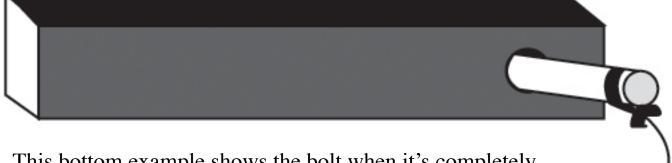

This bottom example shows the bolt when it's completely fished through the vehicle. You may find it easier to keep the bolt fisher attached until you get the tie down receiver in place so that the bolt doesn't fall into the vehicle frame.


WARNING: PULLING TOO HARD ON THE BOLT FISHER CAN RESULT IN LOST FASTENERS, OR BROKEN BOLT FISHER.

## TIE DOWN INSERT INSTALLATION INSTRUCTIONS

On one end of each of your tiedown inserts is a triangular plate referred to by TorkLift as a bullet plate. Your tiedown inserts should be installed with the shorter side of the bullet plate facing away from each other, i.e.. The shorter side of the front insert should point to the front of the truck and the shorter side of the rear insert should point towards the rear of the truck.

Once installed, attach the TorkLift directional stickers to the face of the bullet plate on the insert as a reminder.

#### **DRIVERS SIDE FRONT**

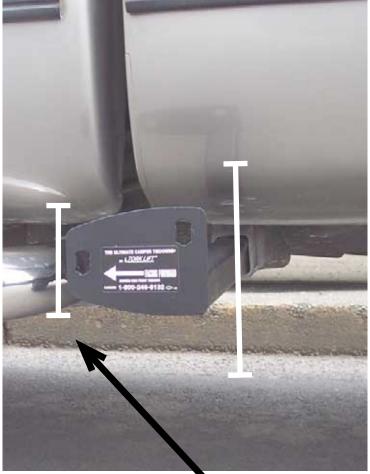

#### **DRIVERS SIDE REAR**





#### **TURNBUCKLE SPRINGLOAD OPTIONS** CONTACT YOUR LOCAL DEALER FOR MORE DETAILS

TorkLift requires all 4 tiedown points to be spring loaded in order to qualify for our manufacturer's

**Industry Exclusive "Camper Anchor" and "Truck Frame" Warranty** 

#### **BASIC SPRINGLOAD KIT -**

**S9000** 

Includes 2 External Springload Cylinder Units, 2 Heavy Duty Forged Turnbuckles and 24" of Chain. Also comes with the TorkLift Lifetime Guarantee.





#### FASTGUNS LEVER ACTION TURNBUCKLES FOR BED MOUNTED TIEDOWNS S9520-GREY SS / S9521-WHITE SS / S9527-POLISHED SS

\_\_\_\_\_

FOR FRAME MOUNTED TIE DOWNS S9522-GREY SS/ S9523-WHITE SS/ S9526-POLISHED SS S9529-BLACK SS

FRAME OR BUMPER MOUNTED TIEDOWNS Includes 2 Stainless Steel Turnbuckles with an Internal "Set" Spring. Available in 2 Lengths and 4 Finishes (Grey, White, Polished Stainless Steel and Black) Also comes with the TorkLift Lifetime Guarantee.

#### FASTGUN DERRINGERS Polished Stainless S9528

Transforms Your Pre-Existing Conventional Turnbuckles into a Lever Action FastGun Style Turnbuckle. Kit includes 4 Lever Action Derringers. Also comes with the TorkLift Lifetime Guarantee.





#### SPRINGLOAD XL KIT - S9050A

This set includes 2 Long Square Bodied Turnbuckles with an Internal "Set" Spring. The Springload XL Kit comes with a High Impact Powdercoated Finish and is compatible with the FastGun Derringer handles. Also comes with the TorkLift Lifetime Guarantee.

# **RECOMMENDED TRUCK CAMPER INSTALLATION INSTRUCTIONS**

When securing any heavy load (especially a camper) in your truck bed, your front tie down points should pull the load forward as much as possible. Some camper anchor points may differ with different manufacturers, as well as the camper jack mounting locations. Your TorkLift tie down inserts have offset triangular brackets to increase the angle of pull. These are designed to be used in the front facing forward, and the rear facing rearward but can be used in either front or rear.

These recommendations are to be considered and followed as a basic rule of thumb. Obviously there will be some applications where this may not be possible. At a minimum, if opposite pull of both front and rear tiedowns cannot be achieved for whatever reason, you should have at least a forward pull at the front or rear location.

If your camper does not come with Rubber Bumpers on the front lower portion of the camper, installing Rubber Bumpers (TorkLift has Rubber Bumpers available Part A7001) or using a block of wood such as a 2 x 4 in the bed, will prevent the camper from damaging the front bulk head of the truck bed.

Minor movement (or settling) can occur in some incidental harsh driving conditions (on or off road). A rubber bed mat is not a requirement to maintain the lifetime warranty on a TorkLift system, but a strong reccommendation simply as a safety precaution to protect the truck bed, the bottom of the camper and to give the camper additional support.

**TORKLIFT DOES NOT RECOMMEND:** Installing your truck camper in your truck on top of a drop in plastic bed liner!!! The drop in plastic bed liners can slide on top of the truck bed surface, and the camper can slide on top of the slick surface of the bed liner. The liner can also act as a spring causing a trampoline effect increasing vertical truck camper movement, independent of the vehicle, possibly resulting in truck bed, and camper damage!

# INSTRUCTIONS FOR FINISH MAINTENANCE OF TORKLIFT PRODUCTS

#### **POWDER COATED STEEL:**

To keep your TorkLift products looking good follow these guidlines. All steel powder coated TorkLift products are sandblasted for maximum adhesion and use a high quality industrial urethane based powder coat. Due to the extreme, harsh, undercar environment that your TorkLift products live in, (consistantly sprayed with corrosive road chemicals such as salt, and road debris), TorkLift does not warranty the power coated finish.

To minimize corrosion from these factors on powder coated steel products, TorkLift recommends regularly cleaning and inspecting the powder coated surface and touching up any affected areas with an enamel or urethane based aerosol paint product. If there are any areas of surface rust, there are also aerosol spray rust converters available on the market that can be used as a preparation to touch-up paint application. These finish maintenance products are available at any automotive parts supplier.

#### **POLISHED STAINLESS STEEL :**

TorkLift utilizes quality grade 304 stainless steel in our stainless steel polished products. 304 stainless steel is well known for its anti-corrosive properties. However, in some environments such as coastal regions or when coming in contact with some road chemicals, corrosion may occur.

For a quick clean simply use WD40 and a cloth rag. We also recommend occasional polishing of our polished stainless products to maintain their attractive finish. Use an approved stainless steel chrome or aluminum mag wheel polish cleaning product which can be purchased from any automotive parts supplier.

# **Torklift International Limited Lifetime Warranty Information**

1901 Fryar Ave Sumner, WA 98390

TorkLift will require proof of purchase to register, with pictures of any defective product before issuing a replacement. TorkLift will not register any product without proof of purchase, which can be faxed, scanned, emailed, or mailed to the information provided below. TorkLift warrants it's hitches, custom hitch receivers, frame mounted tie downs, turnbuckles, and accessories (excluding wireharnesses which carry a 90 day warranty) from date of purchase against defects in material and workmanship under normal use and service for the ownership life of the original consumer purchaser. ALL COMMERCIAL APPLICATIONS ARE WARRANTED FOR A PERIOD OF 90 DAYS FROM THE DATE OF INSTALLATION/SERVICE. Tork-Lift will replace FREE OF CHARGE any part which proves defective in material or workmanship when presented to TorkLift, TRANSPORTATION CHARGES PREPAID by purchaser, at the address above. THIS WAR-RANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLA-TION OR REPLACEMENT, AS WELL AS INCIDENTAL AND CONSE-QUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED. This warranty does not include the finish or paint on our products. Rusting, cracking or peeling of the finish is also excluded. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to TorkLift products as a result of misuse, abuse, neglect, accident, improper installation or any use violative of instructions furnished by TorkLift or WHEN USED IN ANY COMMERCIAL APPLICATION WILL VOID THE WARRANTY. This warranty gives you specific legal rights, and you may also have rights which vary from state to state. With warranty service, you may be able to go to a small claims court, a state court or a federal district court.



1901 Fryar AvenuePhone (800) 246-8132Sumner WA, 98390Fax (253) 854-8003

Or visit our website: www.TorkLift.com

Dear Valued Customer,

Thank you for making TorkLift your choice for truck, camper packages and accessories for your vehicle. By choosing TorkLift products, you have chosen a company that has been serving the RV industry for nearly 40 years and whose name has become synonomous with strength, quality and advanced design and installation.

Please take a few moments of your time to complete the Product Registration Warranty Card on the next page. When registering your newly purchased TorkLift products, you can be assured that your contact information is secure and that you and your product are getting the attention and respect that you deserve.

Thank you again for choosing TorkLift quality products.

#### Register for your lifetime warranty and receive a free Torklift International gift.

To Fax: Send copies of the questionnaire, warranty card and receipt to 253-854-8003

To E-mail: Send copies of the questionnaire, warranty card and receipt to warranty@torklift.com

To Mail: Send to Torklift International 1901 Fryar Ave Sumner, Wa 98390

	INTERNATIONAL
uck/ea	imper Packages & Accessori
<b>OFFICIAL WARRANTY REGISTRATION CARD</b> PLEASE FILL OUT THIS FORM COMPLETELY AND RETURN TO TORKLIFT WITHIN 30 DAYS OF PURCHASE ACCOMPANIED BY A COPY OF YOUR ORIGINAL RECEIPT	
	TODAY'S DATE:
. PART(S) P	URCHASED
PART#:	PART#:
PART#:	PART#:
. PURCHASI	ER INFORMATION
NAME:	
ADDRESS:	
 CITY:	STATE: ZIP / POSTAL CODE:
PHONE: (	<u>) -</u> EMAIL:
. TRUCK IN	FORMATION
	MAKE:
	BED LENGTH:
L CAMPER T	NFORMATION
	MAKE: MODEL:
	NFORMATION
	ROM:
	STATE: ZIP / POSTAL:
INSTALLED BY:	OWNER ABOVE DEALER ANOTHER DEALER

I