

THE CHOICE IN POWER IS AUTOMATIC

8700 SERIES POWER CENTER CONVERTER/CHARGER AC/DC DISTRIBUTION

Automatic three-stage charging provides superior 12-volt system performance, while maintaining the ideal charge and maintenance of your battery.

WF-8700 Series converters bring big performance with 12, 25, 35 and 40 amps DC outputs. They provide a highly reliable nominal 13.6 volts DC with or without a battery and no extra filtering is required.

WFCO's three-stage battery charging results in longer battery life and is totally automatic. Nominal voltage output modes are a 13.2 volts DC range "float" mode, 13.6 volts DC range "absorption" mode and a 14.4 volts DC range "bulk" mode. This ensures longer battery life. Converter protected against over temperature and reverse battery connection.

The cooling fan for the WF-8725, WF-8735 and WF-8740 operates only when needed and ensures quiet operation. Every model is FCC Class B compliant, which means that the converters do not cause interference with televisions, radios or other signals.


The WF-8735 and WF-8740 models bring you the convenience of built-in AC/DC distribution with a 30-amp main AC breaker and total of up to five 20-amp branch AC circuits. While on the WF-8712 and WF-8725 models, up to three 20 amp branch AC circuits can be installed.

Up to six branch DC circuits are available with LED bulbs for each DC circuits to illuminate and identify open circuits.

A NEW WORLD OF POWER IDEAS.



WF-8700 Series
35/40 Amps

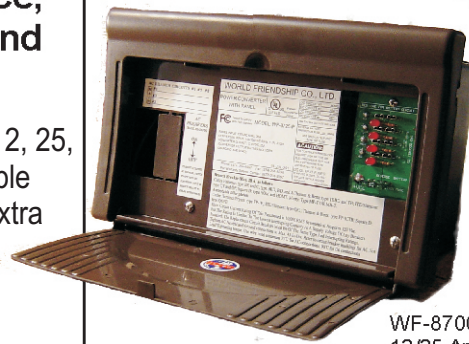

WF-8700 Series
12/25 Amps

**THREE-STAGE
AUTOMATIC
CHARGING RANGES**
14.4 BULK
13.6 ABSORPTION
13.2 FLOAT

Colors available:
brown and black

8700 Series Specifications

Model 8712 12 amps DC output
Input: 105-130 Vac, 60 Hz, 163 W
Dimensions: 11 7/8" W; 7 1/4" H; 5" D
Weight: 4.5 lbs.

Model 8725 25 amps DC output
Input: 105-130 Vac, 60 Hz, 340 W
Dimensions: 11 7/8" W; 7 1/4" H; 5" D
Weight: 4.75 lbs.

Model 8735 35 amps DC output
Input: 105-130 Vac, 60 Hz, 600 W
Dimensions: 11 3/4" W; 8 1/4" H; 5" D
Weight: 5.5 lbs.

Model 8740 40 amps DC output
Input: 105-130 Vac, 60 Hz, 660 W
Dimensions: 11 3/4" W; 8 1/4" H; 5" D
Weight: 5.5 lbs.

All models are UL® and cUL®-Listed and FCC Class B compliant.

Distributed by

ARTERRA
DISTRIBUTION

2021 Aeroplex Drive North
Elkhart, IN 46514
Phone:(574) 294-8997
Fax:(574) 294-8698
www.wfcoelectronics.com

